


WAVEGUIDE ANTI-LEAK GASKET

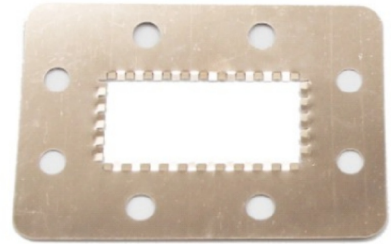

Waveguide Anti-leak Gasket

ELECTRICAL CHARACTERISTICS:

Part No.	WG Type (EIA)	Freq Range (GHz)	Flange	Thickness (mm)	Material
SH-3WG0.2F	WR2300	0.32-0.49	FDP	0.2	Cu
SH-4WG0.2F	WR2100	0.35-0.53	FDP	0.2	Cu
SH-5WG0.2F	WR1800	0.41-0.62	FDP	0.2	Cu
SH-6WG0.2F	WR1500	0.49-0.75	FDP	0.2	Cu
SH-8WG0.2F	WR1150	0.64-0.98	FDP	0.2	Cu
SH-9WG0.2F	WR975	0.75-1.15	FDP	0.2	Cu
SH-12WG0.2F	WR770	0.96-1.46	FDP	0.2	Cu
SH-14WG0.2F	WR650	1.13-1.73	FDP	0.2	Cu
SH-18WG0.2F	WR510	1.45-2.20	FDP	0.2	Cu
SH-22WG0.2F	WR430	1.72-2.61	FDP	0.2	Cu
SH-26WG0.2F	WR340	2.17-3.30	FDP	0.2	Cu
SH-32WG0.2F	WR284	2.60-3.95	FDP	0.2	Cu
SH-40WG0.2F	WR229	3.22-4.90	FDP	0.2	Cu
SH-48WG0.2F	WR187	3.94-5.99	FDP	0.2	Cu
SH-58WG0.2F	WR159	4.64-7.05	FDP	0.2	Cu
SH-70WG0.2F	WR137	5.38-8.17	FDP	0.2	Cu
SH-84WG0.1F	WR112	6.57-9.99	FBP	0.1	Cu
SH-100WG0.1F	WR90	8.20-12.40	FBP	0.1	Cu
SH-120WG0.1F	WR75	9.84-15.0	FBP	0.1	Cu
SH-140WGO.1F	WR62	11.9-18.0	FBP	0.1	Cu
SH-180WG0.1F	WR51	14.5-22.0	FBP	0.1	Cu
SH-220WG0.1F	WR42	17.6-26.7	FBP	0.1	Cu
SH-260WG0.1F	WR34	21.7-33.0	FBP	0.1	Cu
SH-320WG0.1F	WR28	26.5-40.0	FBP	0.1	Cu
SH-400WG0.1F	WR22	32.9-50.1	FUGP	0.1	Cu
SH-500WG0.1F	WR19	39.2-59.6	FUGP	0.1	Cu
SH-620WG0.1F	WR15	49.8-75.8	FUGP	0.1	Cu
SH-740WG0.1F	WR12	60.5-91.9	FUGP	0.1	Cu
SH-900WG0.1F	WR10	73.8-112	FUGP	0.1	Cu

WAVEGUIDE ANTI-LEAK GASKET

Rectangular to Rectangular
Waveguide Adapter Specials



ELECTRICAL CHARACTERISTICS:

Part No.	Freq Range (GHz)	Port 1 WG Type (EIA)	Port 2 WG Type (EIA)	Flange	Material
SH-2240WA...	3.22-4.90	WR430	WR229	FDP	Al
SH-2658WA...	4.64-7.05	WR340	WR159	FDP	Al
SH-3270WA...	5.38-8.17	WR284	WR137	FDP	Al
SH-4084WA...	6.57-9.99	WR229	WR112	FDP/FBP	Al
SH-48100WA...	8.20-12.4	WR187	WR90	FDP/FBP	Al
SH-58120WA...	9.84-15.0	WR159	WR75	FDP/FBP	Al
SH-70140WA...	11.9-18.0	WR137	WR62	FDP/FBP	Al
SH-84180WA...	14.5-22.0	WR112	WR51	FBP	Cu
SH-100220WA...	17.6-26.7	WR90	WR42	FBP	Cu
SH-120260WA...	21.7-33.0	WR75	WR34	FBP	Cu
SH-140320WA...	26.5-40.0	WR62	WR28	FBP	Cu
SH-180400WA...	32.9-50.1	WR51	WR22	FBP/FUGP	Cu
SH-220500WA...	39.2-59.6	WR42	WR19	FBP/FUGP	Cu
SH-260620WA...	49.8-75.8	WR34	WR15	FBP/FUGP	Cu
SH-320740WA...	60.5-91.9	WR28	WR12	FBP/FUGP	Cu
SH-400900WA...	73.8-112	WR22	WR10	FUGP	Cu